




Air Process Heaters

1/2" Diameter – Horizontal use only

Construction

- 1 Optional stainless steel bushing — 3/8" NPT male fitting.
- 2 Fiberglass insulated leads.
- 3 Epoxy seal.
- 4 Copper tee.
- 5 Optional brass bushing — 3/8" NPT male fitting.

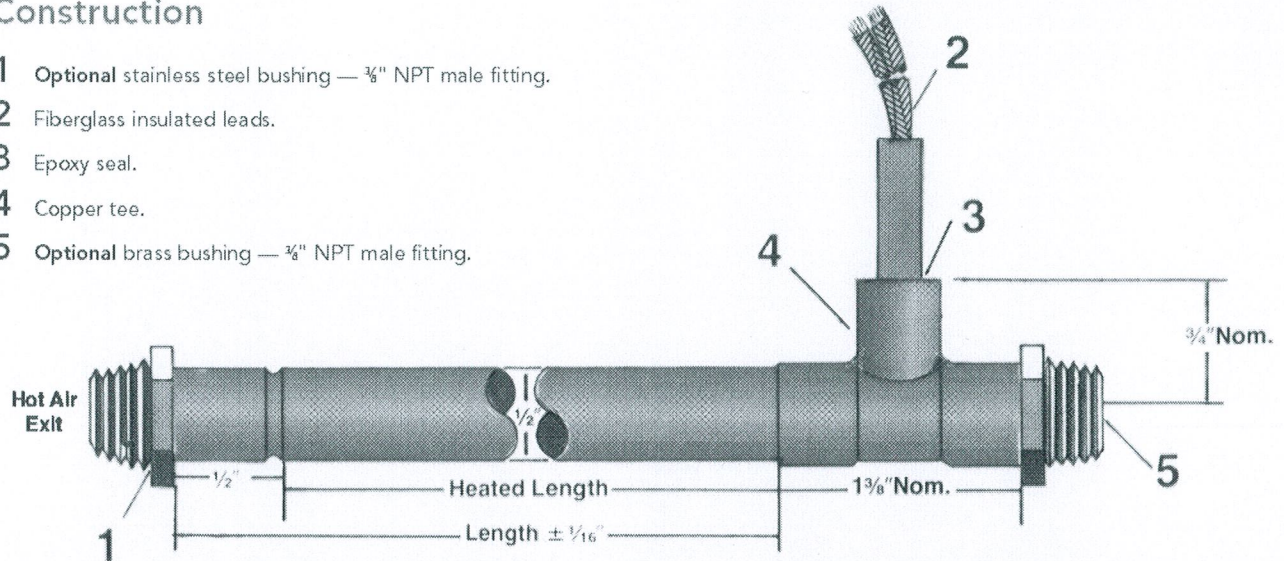

▼ Manufactured Items ▼

Specifications


Maximum Amperage: 10

Cross Sectional Flow Area: .036 sq. in.

Maximum CFM: 10

CFM	Max. Watts/linear in of heated length
1	80
2	80
4	100
6	150
8	200
10	250

Pressure rating: 80 psig.

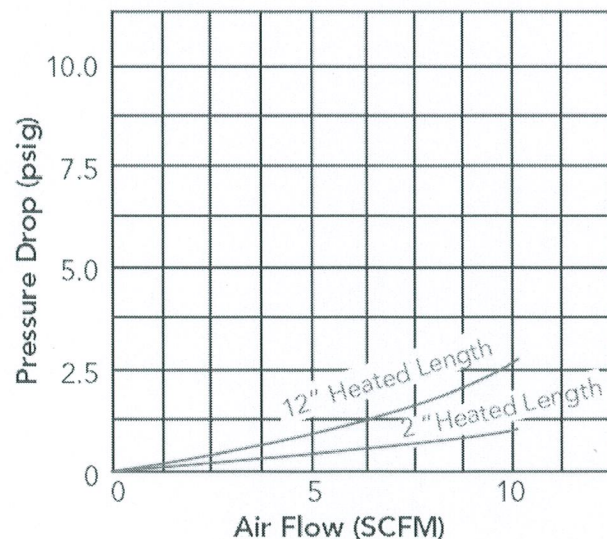

Sizes

Diameter: 1/2"

Length	Heated Length	Cat. No. w/o fittings	Cat. No. w/Male NPT fittings
2"	1 1/2"	AH50-2	AH50-2MF
3"	2 1/2"	AH50-3	AH50-3MF
4"	3 1/2"	AH50-4	AH50-4MF
5"	4 1/2"	AH50-5	AH50-5MF
6"	5 1/2"	AH50-6	AH50-6MF
7"	6 1/2"	AH50-7	AH50-7MF
8"	7 1/2"	AH50-8	AH50-8MF
9"	8 1/2"	AH50-9	AH50-9MF
10"	9 1/2"	AH50-10	AH50-10MF

Special Features Available

MF: 3/8" NPT male fittings (add MF to catalog number).

FF: 1/8" NPT female fittings (add FF to catalog number).

HF: Hose adapter on entry end only (add HF to catalog number and specify I.D. of hose).




Air Process Heaters

▼ IN STOCK ITEMS ▼

Standard Air Heaters

Supplied with: Type SF2 leads

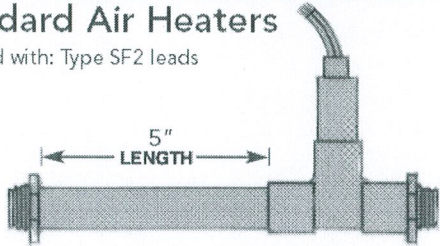

Length	Cat. No.	Dia.	Wattage	Voltage	Watts/		Lead Length	Fittings
					Linear Inch	Weight		
5"	AH50-5	1/2"	100	120	22	.18	12"	
5"	AH50-5MF	1/2"	100	120	22	.25	12"	3/8" NPT
5"	AH50-5	1/2"	400	120	88	.18	12"	
5"	AH50-5MF	1/2"	400	120	88	.25	12"	3/8" NPT
5"	AH50-5	1/2"	400	240	88	.18	12"	
5"	AH50-5MF	1/2"	400	240	88	.25	12"	3/8" NPT

AIR